

PRODUCT SPECIFICATION

Model No.: CSDD-S56222 CSDD-S56223

Descriptions:
<ul style="list-style-type: none"> ■ 0.56 Inch Dual Digit SMD Display ■ CSDD-S56222 is Common Anode ■ CSDD-S56223 is Common Cathode ■ Emitting Color: Pure Green; Yellow Green; Yellow; Amber; Orange; Red; Deep Red ■ Standard: -11: Gray face, white segment. -21: Black face, white segment.



CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY

OPTO PLUS TECHNOLOGIES CO.,LTD
 Address:No.696,Yangming North Rd,
 ShaoXing City,ZheJiang Province, P.R.China.
 Tel :86-575-88623888
 Fax:86-575-88623112

Model No.: CSDD-S56222 CSDD-S56223


Features -

1. 0.56 inch (14.2mm) digit height.
2. Qualified according to JEDEC moisture sensitivity Level 2a.
3. RoHS compliant.
4. Low power consumption.
5. Easy mounting on P.C. board .


Device Selection Guide -

Model No.	Chip	
	Material	Emitting Color
CSDD-S5622x2	InGaN AlGaNP	Pure Green
CSDD-S5622xM		Yellow Green
CSDD-S5622xT		Yellow
CSDD-S5622xA		Amber
CSDD-S5622xV		Orange
CSDD-S5622xL		Red
CSDD-S5622xU		Deep Red

LED Numeric/Alphanumeric Display

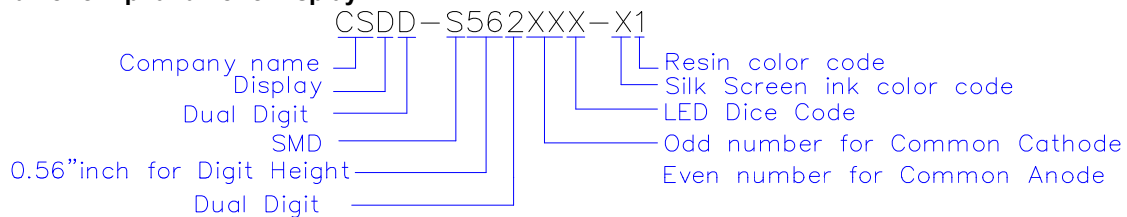


Mechanical Dimensions -

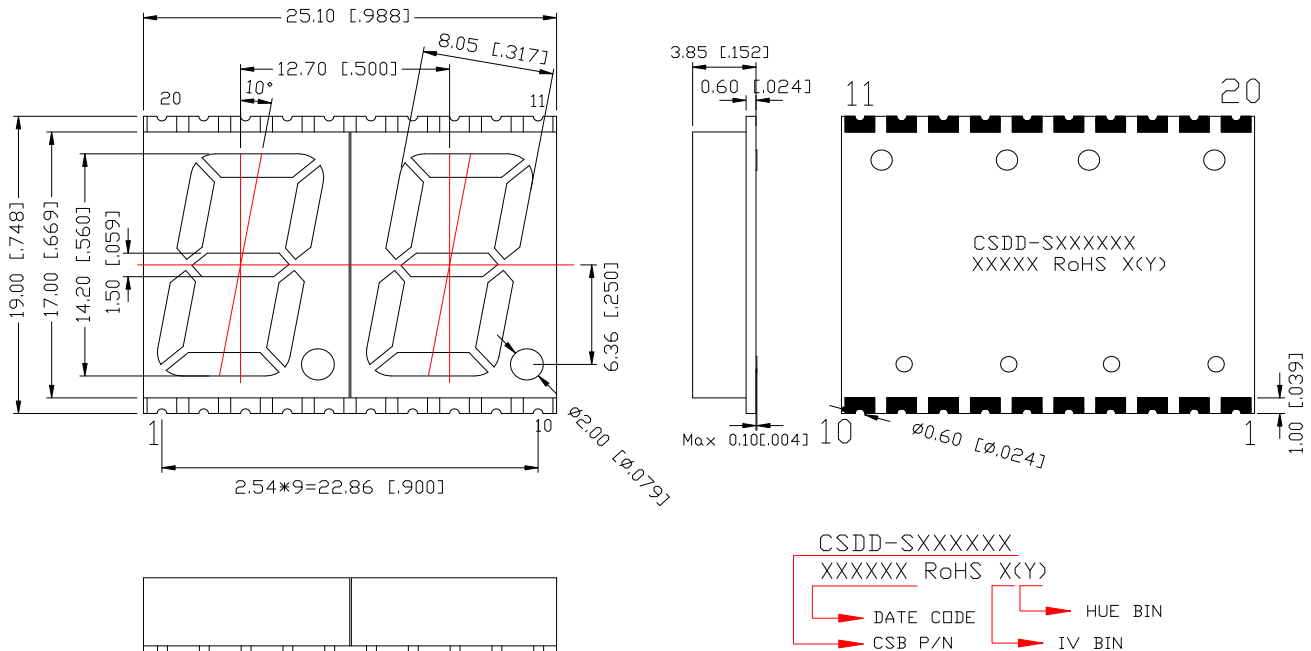





Notes:

1. Dimension in millimeter [inch], tolerance is ± 0.25 [0.010] and angle is $\pm 1^\circ$ unless otherwise noted.
2. Bending \leq Length*1%.

■ All Light On Segments Feature & Pin Position

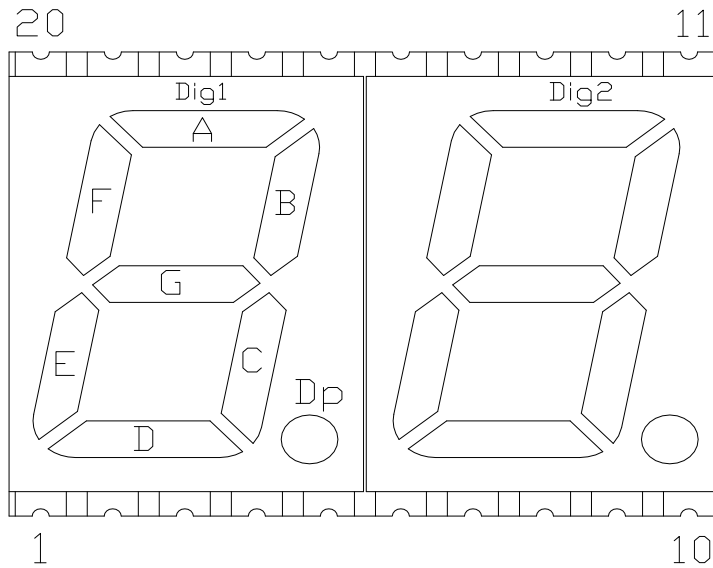

■ Internal Circuit Diagrams -

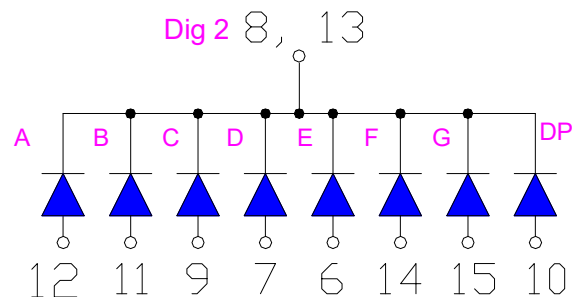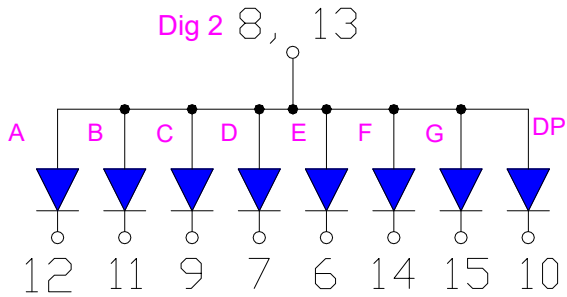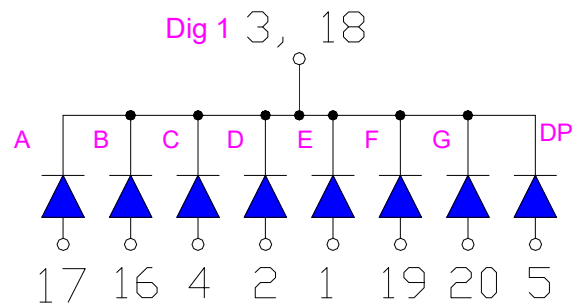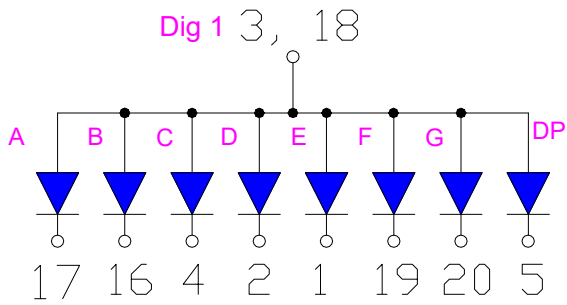

CSDD-S56222 is Common Anode

CSDD-S56223 is Common Cathode

Model No.: CSDD-S56222 CSDD-S56223

■ Absolute Maximum Rating -

(Ta=25°C)

Parameter	Symbol	Rating		Unit
		2	M/T/A/V/L/U	
Power Dissipation Per Dice	PAD	114	70	mW
Derating Liner from 25°C per Dice	-	0.4	0.33	mA/°C
Continuous Forward Current Per Dice	IAF	30	25	mA
Peak Current Per Dice(duty cycle 1/10,1KHz)	IPF	100	90	mA
Reverse Voltage Per Dice	VR	5	5	V
Electrostatic discharge(HBM)	ESD	1000	/	V
Operating Temp.	Topr	-40 ~ +105		°C
Storage Temp.	Tstg	-40 ~ +105		°C
Hand Soldering Temp.	Tsol	350		°C

■ Electro-optical Characteristics -

(Ta=25°C)

Parameter	Symbol	Chip	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity Per Segment	Iv	2	-	70	-	mcd	If=10mA
		M	-	3	-		
		T	-	17	-		
		A	-	18	-		
		V	-	13	-		
		L	-	9	-		
		U	-	8	-		
Forward Voltage Per Segment	VF	2	-	3.2	3.8	V	If=20mA
		M/T/A/V/L/U	-	2	2.8		
Peak Emission Wavelength / Dominant Wavelength	λP/λd	2	-	*/525	-	nm	If=10mA
		M	-	572/570	-		
		T	-	592/590	-		
		A	-	612/605	-		
		V	-	632/625	-		
		L	-	644/630	-		
		U	-	660/645	-		
Reverse Current	IR		-	-	100	μA	VR=5V
Luminous Intensity Matching Ratio	IV-m		-	-	2:1	-	If=10mA

■ Electrical / Optical Characteristics Curves -

(Ta = 25°C Unless Otherwise Noted)

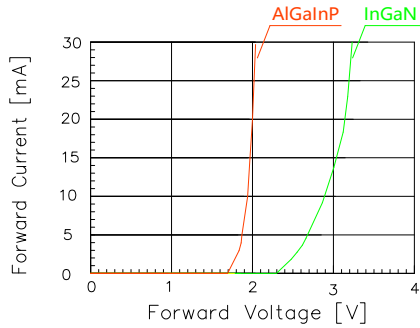


Fig 1. Forward Current vs. Forward Voltage

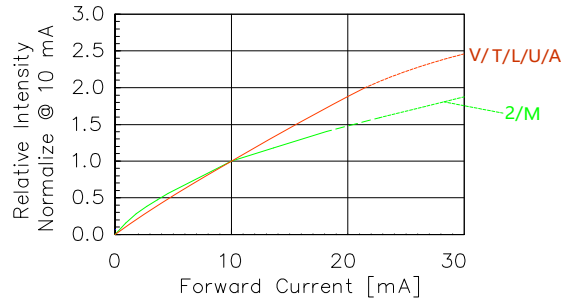


Fig 2. Relative Intensity vs. Forward Current

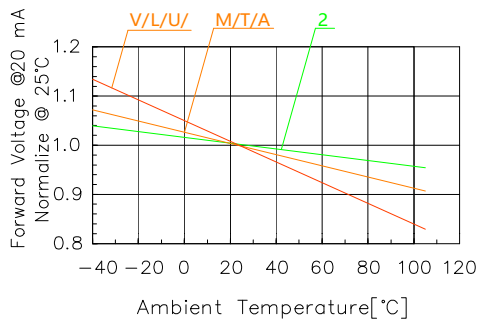


Fig 3. Forward Voltage vs. Temperature

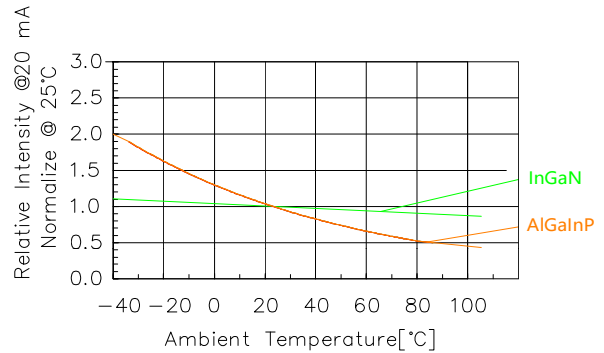


Fig 4. Relative Intensity vs. Temperature

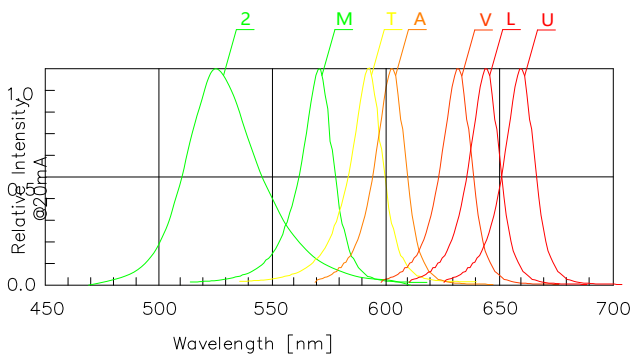


Fig 5. Relative Intensity vs. Wavelength


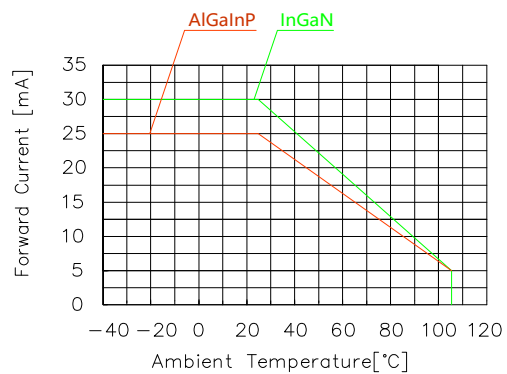


Fig 6. Forward current vs. Temperature

Model No.: CSDD-S56222 CSDD-S56223

SMT REFLOW SOLDERING INSTRUCTIONS


■ IR Reflow Temperature / Time :

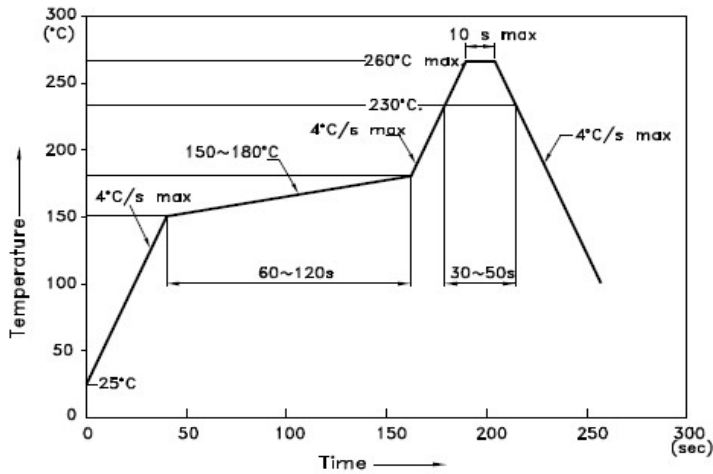

NOTES:


1. We recommend the reflow temperature 245°C (+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

■ Soldering Pad Size

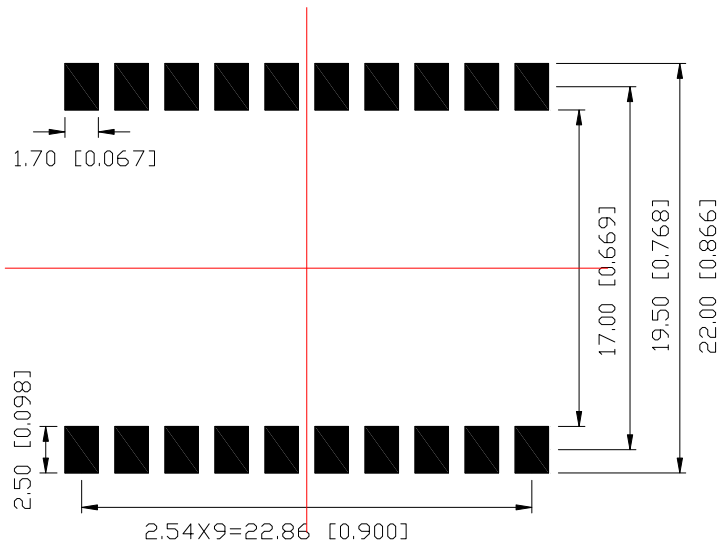


Model No.: CSDD-S56222 CSDD-S56223

■ REEL DIMENSIONS

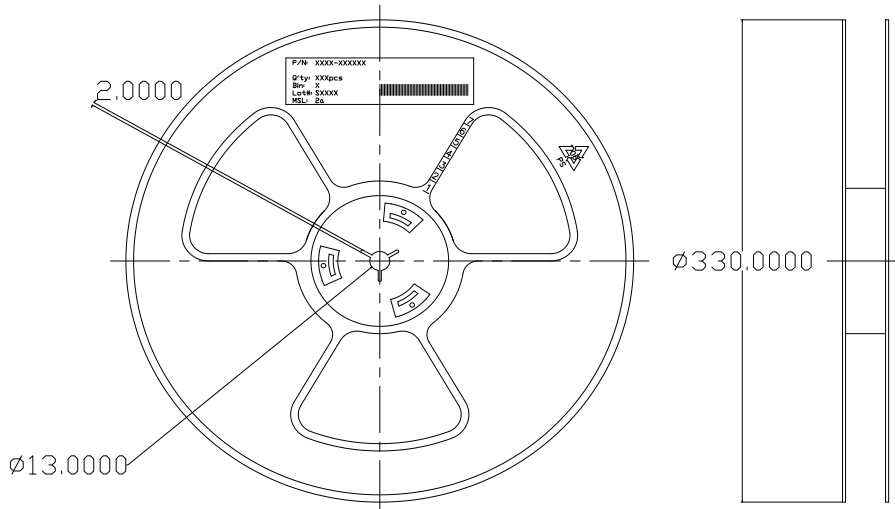

■ PACKING & LABEL SPECIFICATIONS

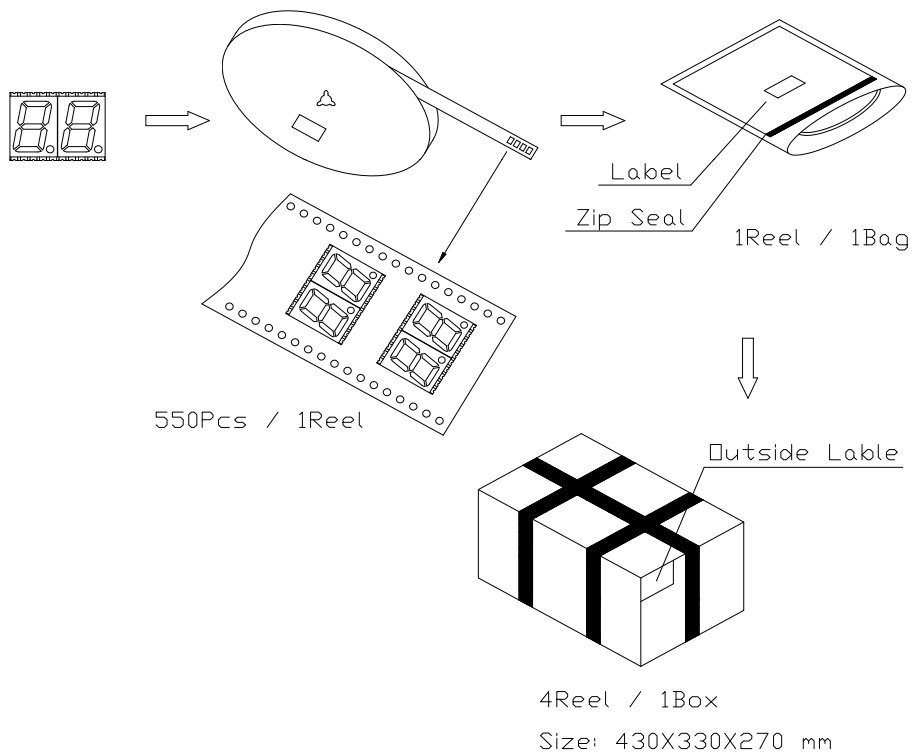

Note: The specifications are subject to change without notice. Please contact us for updated information.